

# 2409111565 Die attach material change for EFM32GG11x/12x (BGA-10x10)

PCN Issue Date: Sep 11, 2024 Effective Date: Dec 17, 2024

PCN Type: Assembly

# **Description of Change**

Silicon Labs is pleased to announce the change of die attach material from Henkel Ablebond 2025D epoxy to Henkel ATB-F125E DAF for all EFM32GG11 & EFM32GG12 (112-LFBGA-10x10) devices.

As of the effective date of this notification, Silicon Labs will fulfill orders using materials built with either Henkel Ablebond 2025D epoxy or Henkel ATB-F125E DAF. Once the current materials built with epoxy are depleted, orders will be 100% fulfilled with the materials built with DAF.

# **Reason for Change**

To qualify a new die attach material.

# Impact on Form, Fit, Function, Quality, Reliability

There is no impact on form, fit, function, Quality or Reliability.

## **Product Identification**

Existing Part # EFM32GG11B310F2048GL112-B EFM32GG11B310F2048GL112-BR EFM32GG11B320F2048GL112-B EFM32GG11B320F2048GL112-BR EFM32GG11B420F2048GL112-B EFM32GG11B420F2048GL112-BR EFM32GG11B420F2048IL112-B EFM32GG11B420F2048IL112-BR EFM32GG12B310F1024GL112-A EFM32GG12B310F1024GL112-AR EFM32GG12B330F512GL112-A EFM32GG12B330F512GL112-AR EFM32GG12B410F1024GL112-A EFM32GG12B410F1024GL112-AR EFM32GG12B410F1024IL112-A EFM32GG12B410F1024IL112-AR EFM32GG12B430F512GL112-A EFM32GG12B430F512GL112-AR EFM32GG12B430F512IL112-A EFM32GG12B430F512IL112-AR EFM32GG12B510F1024GL112-A EFM32GG12B510F1024GL112-AR EFM32GG12B510F1024IL112-A EFM32GG12B510F1024IL112-AR EFM32GG12B530F512GL112-A EFM32GG12B530F512GL112-AR EFM32GG12B530F512IL112-A EFM32GG12B530F512IL112-AR EFM32GG12B810F1024GL112-A EFM32GG12B810F1024GL112-AR

EFM32GG12B810F1024IL112-A

EFM32GG12B810F1024IL112-AR EFM32GG12B830F512GL112-A EFM32GG12B830F512GL112-AR EFM32GG12B830F512IL112-A EFM32GG12B830F512IL112-AR

Last Date of Unchanged Product: Dec 17, 2024

## **Qualification Samples**

Qualification samples available upon request.

## **Customer Response**

Lack of acknowledgment of the PCN within 30 days constitutes acceptance of the change, Ref. JEDEC-J-STD-046.

To request further data or inquire about this notification, please contact your Silicon Labs sales representative. A list of Silicon Labs sales representatives is available at <a href="http://www.silabs.com">http://www.silabs.com</a>.

Customers may approve early PCN acceptance by emailing approval, along with PCN # to PCN@silabs.com

## **User Registration**

Register today to create your account on Silabs.com. Your personalized profile allows you to receive technical document updates, new product announcements, "how-to" and design documents, product change notices (PCN) and other valuable content available only to registered users. <a href="http://www.silabs.com/profile">http://www.silabs.com/profile</a>

## **Qualification Data**

Available upon request.



### GM11B31KGx, GM11B32KGx, GM11B42KGx, GM11B42KIx Qualification Report

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL QualitySystems@silabs.com

Test Name	Test Condition	Qualification	Start	End	Notes	Summary	Status
Test Group A - A	Accelerated Environment Stress	s Tests					
uHAST	JA118		Q051417	0/30			
	130°C, 85%RH	3 lots, N=>25	Q051420	0/30		3 lots	Pass
	Vcc=3.8V, 96 hours		Q051423	0/30		0/90	
Temp Cycle	JA104		Q051416	0/30			
	Cond C: -65°C to 150°C	3 lots, N=>25	Q051419	0/30		3 lots	Pass
	500 cycles		Q051422	0/30		0/90	

#### Notes

1. Parts are Pre-conditioned at MSL3/260°C

This report	applies	to the	following	part numbers:

EFM32GG11B310F2048GL112-B EFM32GG11B310F2048GL112-BR EFM32GG11B320F2048GL112-B EFM32GG11B320F2048GL112-BR EFM32GG11B420F2048GL112-B EFM32GG11B420F2048GL112-BR EFM32GG11B420F2048IL112-B EFM32GG11B420F2048IL112-BR

Prepared on: 2024-08-23 by Ed Sharp

<sup>1</sup> sllabs.com | QP02142\_GM11831KGx\_GM11832KGx\_GM11842KGx\_GM11842KIx\_Qual\_Report



## GM12B3xJx, GM12B3xHx, GM12B4xJx Qualification Report

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

Test Name	Test Condition	Qualification	Start	End	Notes	Summary	Status
Test Group A - A	Accelerated Environment Stress	s Tests	100				
uHAST	JA118		Q051407	0/30		П	
	130°C, 85%RH	3 lots, N≪>25	Q051410	0/30		3 lots	Pass
1	Vcc=3.8V, 96 hours		Q051413	0/30		0/90	
Temp Cycle	JA104		Q051408	0/30			
	Cond C: -65°C to 150°C	3 lots, N=>25	Q051411	0/30		3 lots	Pass
	500 cycles		Q051414	0/30		0/90	

#### Notes:

1. Parts are Pre-conditioned at MSL3/260°C

Their many mich	man better \$10 miles of their	45 mm	Aller, S.E. den and den ex-	me m left 's	the state of the last last last last
This report	applies to	une	TOHOWING	Dart I	numbers:

EFM32GG12B310F1024GL112-A EFM32GG12B310F1024GL112-AR EFM32GG12B330F512GL112-A EFM32GG12B330F512GL112-AR EFM32GG12B410F1024GL112-A EFM32GG12B410F1024GL112-AR EFM32GG12B410F1024lL112-A EFM32GG12B410F1024lL112-AR EFM32GG12B430F512GL112-A EFM32GG12B430F512GL112-AR EFM32GG12B430F512lL112-A EFM32GG12B430F512lL112-AR

Prepared on: 2024-05-23 by Ed Sharp

<sup>1</sup> silabs.com | QP02141\_GM12B3xJx\_GM12B3xHx\_GM12B4xJx\_Qual\_Report



## GM12B5x, GM12B8x Qualification Report

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

Test Name	Test Condition	Qualification	Start	End	Notes	Summary	Status
Test Group A - A	Accelerated Environment Stress	Tests					
uHAST	JA118		Q051289	0/30			
	130°C, 85%RH	3 lots, N=>25	Q051292	0/30		3 lots	Pass
	Vcc=3.8V, 96 hours		Q051295	0/30		0/90	
Temp Cycle	JA104		Q051290	0/30			
	Cond C: -65°C to 150°C	3 lots, N=>25	Q051293	0/30		3 lots	Pass
	500 cycles	- No.	Q051296	0/30		0/90	

#### Notes


1. Parts are Pre-conditioned at MSL3/260°C

This report a	polies to the	following r	part numbers:

EFM32GG12B530F512IL112-A EFM32GG12B530F512IL112-AR EFM32GG12B810F1024GL112-A EFM32GG12B810F1024GL112-AR EFM32GG12B810F1024IL112-AR EFM32GG12B810F1024IL112-AR EFM32GG12B830F512GL112-AR EFM32GG12B830F512GL112-AR EFM32GG12B510F1024GL112-A EFM32GG12B510F1024GL112-AR EFM32GG12B830F512IL112-A EFM32GG12B830F512IL112-AR EFM32GG12B510F1024IL112-A EFM32GG12B510F1024IL112-AR EFM32GG12B530F512GL112-A EFM32GG12B530F512GL112-AR

1 allaba.com | QP02125\_GM12B5x\_GM12B5x\_Qual Report

Prepared on: 2024-08-23 by Ed Sharp

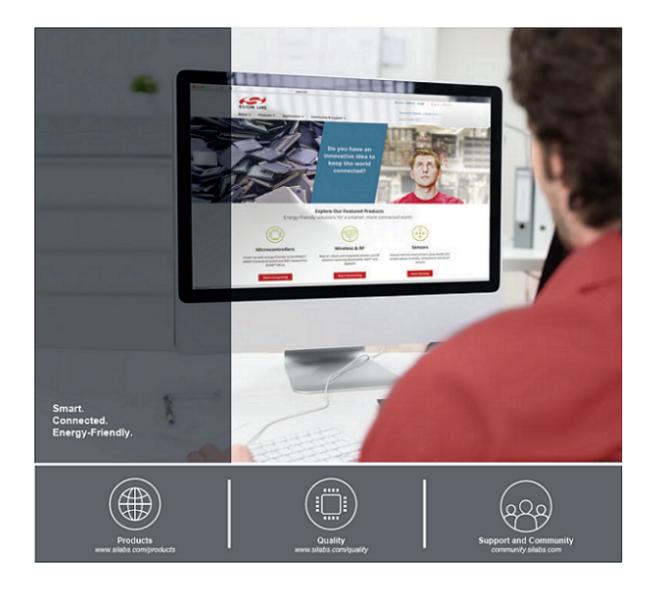

## Disclaimer

Silicon Labs intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Labs products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Labs reserves the right to make changes without further notice and limitation to product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Silicon Labs shall have no liability for the consequences of use of the information supplied herein. This document does not imply or express copyright licenses granted hereunder to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any Life Support System without the specific written consent of Silicon Labs. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Labs products are not designed or authorized for military applications. Silicon Labs products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons.

## **Trademark Information**

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, Clockbuilder®, CMEMS®, DSPLL®, EFM®, EFM32®, EFR, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, ISOmodem®, Micrium, Precision32®, ProSLIC®, Simplicity Studio®, SiPHY®, Telegesis, the Telegesis Logo®, USBXpress®, Zentri and others are trademarks or registered trademarks of Silicon Labs. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. All other products or brand names mentioned herein are trademarks of their respective holders.



Silicon Laboratories Inc. 400 West Cesar Chavez Austin, TX 78701